



# Circadia DUO<sup>1</sup>

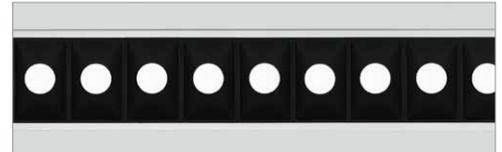

Innovative Optical Chamber Design

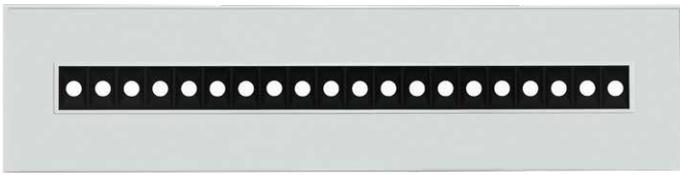

Inner and outer Tuneable White (1 channel) DUO<sup>1</sup> Same together



## Key Family Details

Optical System:	Hybrid black optical chambers and diffuser
Mounting Type:	Exposed T-Bar
Colour Consistency Initial:	3 SDCM
Finish Options:	Standard white. Other finish options via customisation
System Warranty:	5 years
CCT:	2700-6500K
CRI (Ra):	90+ (95 typical)
R9:	70+ (74 typical)
COI Compliant:	Only within the 3500-4000K range
Melanopic Ratio	0.76
Circadian Stimulus CS [%] (*)	15
Circadian Light Cla [lux] (*)	105

(\*): CS and Cla values are calculated for 150lux photopic corneal illumination and provided as a guide only.

## Application

Circadia is a new premium office luminaire family designed for workplace wellness, productivity and sustainability.

With its dual light component design consisting of a diffuse element and a central array of optical chambers, Circadia provides premium quality, low-glare illumination for the modern workplace.

Delivering a sense of comfort, wellbeing and harmony for occupants with minimal energy consumption, Circadia is the product of choice for asset owners looking to achieve or enhance the WELL, Green Star, NABERS or other sustainability performance rating of their buildings.

The Tuneable White functionality of the DUO variants helps obtaining additional points in WELL V2 under Feature L08 Occupant Control of Lighting Environments.

## Design

Innovative optical chamber design delivers optimal wide beam distribution with low glare.

Made from advanced microstructured film that offers controlled batwing light distribution, Circadia's diffuse element allows for wider spacing with fewer luminaires required in the lighting array, making it a cost-effective solution for new fitouts and retrofit projects alike.

Diffuse aperture also provides a pleasant transition between ceiling and light source. The product exceeds BCA 2019/J6 requirements via optimised beam distribution.

## Optics

Black optical chambers with internal diffusers form the primary, task lighting component whilst an independent light source is used to create the diffuse peripheral component.

## Control

Tuneable White with various control options based on DALI DT8 or CASAMBI wireless, such as via mobile devices, DALI controller or e-TouchPanel.

Circadian Lighting

The combination of LED chips with the right spectral distribution and an optimum beam distribution achieves ideal vertical illuminance levels with high Circadian Stimulus (CS) and Circadian Lighting (Cla) values. Tuneable White functionality provides additional Visual-Biological-Emotional benefits.

## Lifetime

Constant Light Output (CLO) feature comes as standard across the range and ensures no lumen depreciation for the lifetime of the product.

## Light Quality

CRI90+ (95 typ.) as standard with R9>70 (74 typ.), initial colour consistency better than 3 SDCM as measured separately for cool and warm components.


N.B. COI compliance is only achieved within the 3500-4000K tuning range. This product should not be used as a COI compliant fitting.

## Mounting Options


- Plaster Recessed via Recessing kit.
- Surface Mounting via a Surface Mount Kit

## Mechanical Drawing

Physical Parameters	Luminaire Dimensions			Aperture Size		Cutout Size		Weight
Code	L [mm]	W [mm]	H [mm]	D [mm]	E [mm]	Acout [mm]	Bcout [mm]	[kg]
EL-CIR-1125 ... -1128	1194	293	60					6.8
EL-CIR-1129 ... -1130	1494	293	60					8.5
EL-ACC-430-000	Circadia Restraining Kit Incl 4x Grippler, 2x 2m Wire							

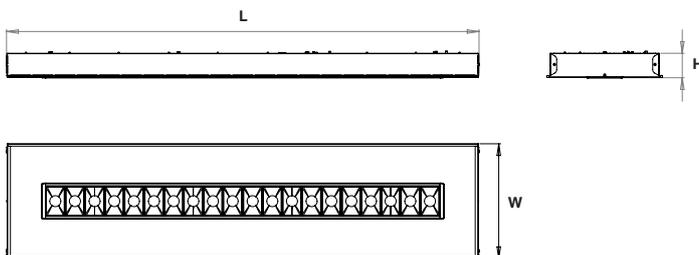


## Polar Curve 1200x300 940





Maximum Candela = 422cd/klm  
Located At Horizontal Angle = 90, Vertical Angle = 21

## Polar Curve 1500x300 940



Maximum Candela = 421cd/klm  
Located At Horizontal Angle = 90, Vertical Angle = 22

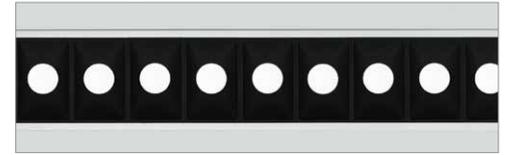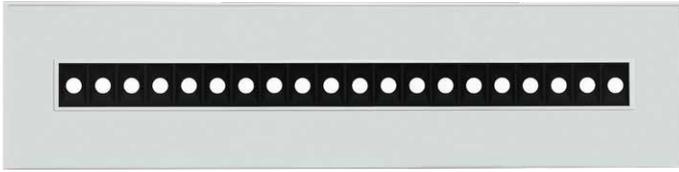

Innovative Optical Chamber Design



Inner and outer Tuneable White (1 channel) DUO<sup>1</sup> Same together

## 320 Lux Target Illuminance

Code	Power Initial CLO [W]	Final Power CLO [W]	Systems Lumens [lm]	Luminaire Lumens [lm]	Efficacy Initial [lm/W]	Nominal Size [mmxmm]	Spacing (h=2.7m) [m x m]	Final W/m <sup>2</sup> CLO	Calculated UGR max	LLMF L100B50 [hrs]
										LM80 duration: 12,000hrs
EL-CIR-1125-254	25	31	3,300	2,150	85	1200 x 300	2.4m x 2.4m	5.38	19	72,000
EL-CIR-1126-254	28	34	3,750	2,420	86	1200 x 300	2.4m x 2.7m	5.25	19	72,000
EL-CIR-1127-254	30	37	4,000	2,588	87	1200 x 300	2.4m x 3.0m	5.14	19	72,000
EL-CIR-1129-254	31	37	4,100	2,704	88	1500 x 300	3.0m x 2.5m	4.93	19	72,000
EL-CIR-1130-254	36	44	4,900	3,255	90	1500 x 300	3.0m x 3.0m	4.89	19	72,000
EL-ACC-430-000	CIRCADIA RESTRAINING KIT INCL 4X GRIPPLE, 2X 2M WIRE									

## 400 Lux Target Illuminance

Code	Power Initial CLO [W]	Final Power CLO [W]	Systems Lumens [lm]	Luminaire Lumens [lm]	Efficacy Initial [lm/W]	Nominal Size [mmxmm]	Spacing (h=2.7m) [m x m]	Final W/m <sup>2</sup> CLO	Calculated UGR max	LLMF L100B50 [hrs]
										LM80 duration: 12,000hrs
EL-CIR-1128-254	36	44	4,900	3,187	88	1200 x 300	2.4m x 3.0m	6.11	19	72,000
EL-ACC-430-000	Circadia Restraining Kit Incl 4x Gripple, 2x 2m Wire									

Design Parameters: Lf=0.80 (Nominal), Room Reflectances (C/W/F): 0.70/0.50/0.20, Ceiling height=2.7m, Eh @0.72m AFFL.

N.B. All optical data shown above is valid for the versions with white chambers.

## Surface Mount Kits

Code	Length [mm]	Width [mm]	Height [mm]	Standard Finish [**]
EL-ACC-897-000	1200	300	80	White
EL-ACC-898-000	1500	300	80	White







[\*\*]: Other finish options available via customisation

## Wiring options

## Suffix

Tunable White DUO1 (DALI Type 8)	-254
Tunable White DUO1 (Wireless - Casambi)	-284

EL-CIR-1125-254 - 25W 3300LM 940 1200x300

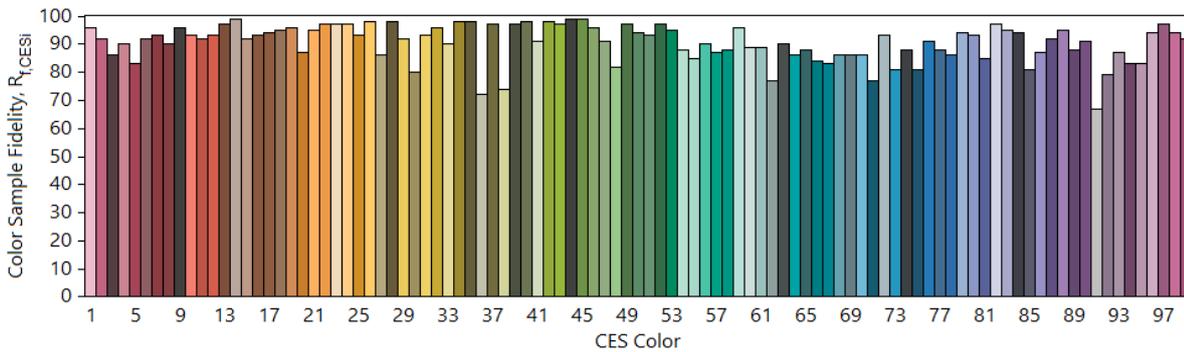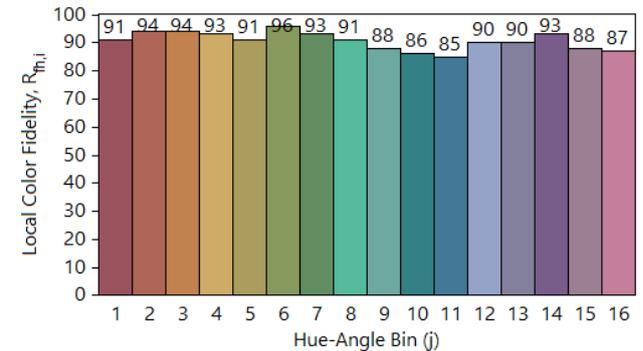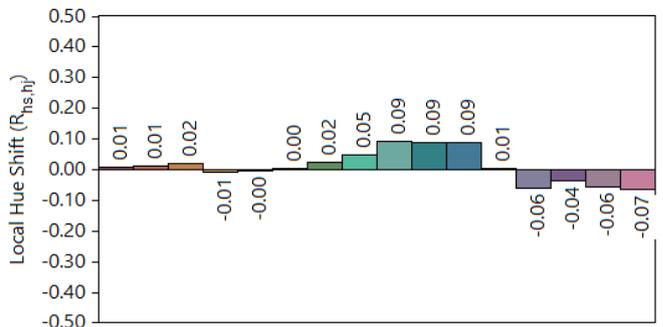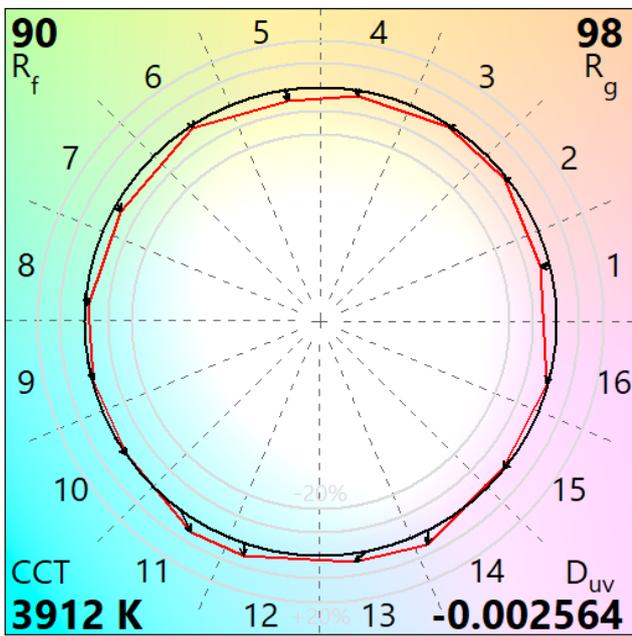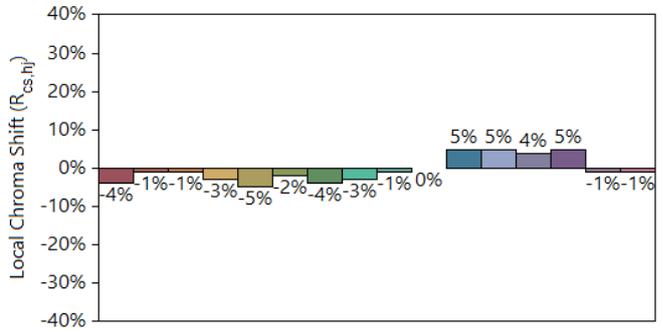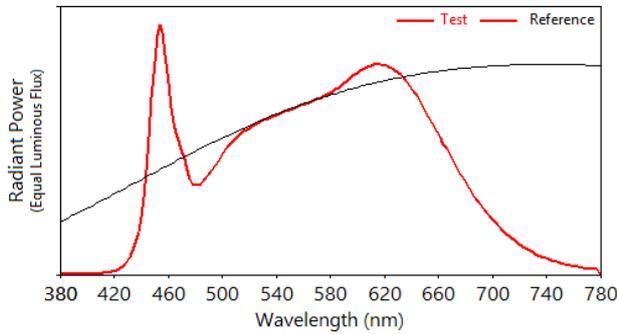

**Notes:** EL-CIR-1125-254CIRCADIA ET 25W 3300LM 927-965  
1200X300 BLK-OP DALI DUO1 CLO, representative of Circadia  
DUOx Black variants.

**x** 0.382504  
**y** 0.372569  
**u'** 0.228162  
**v'** 0.500032

**CIE 13.3-1995**  
**(CRI)**  
**R<sub>a</sub>** 95  
**R<sub>g</sub>** 75

Colors are for visual orientation purposes only.